KORATHERM® INFORMATION FOR WALL MOUNTING

Single wall bracket - angular

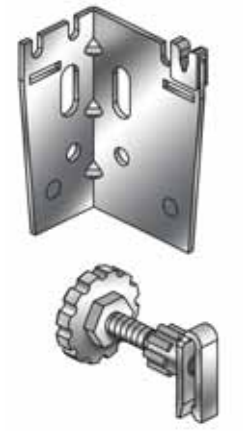

- The set includes two brackets, two supports, 8 x 60 mm screws, and ø 10 mm expansion plugs
- Metal parts are galvanized
- For use in concrete construction and cellular concrete or solid brick construction
- For wall mounting at a distance of **D = 54 mm or 36 mm** from the wall
- Maximum vertical load for the bracket is **700 N**

Ordering brackets

Type	Order number
Single wall bracket - angular	Z-U300

Number of brackets for KORATHERM HORIZONTAL, HORIZONTAL - M

KORATHERM HORIZONTAL, HORIZONTAL - M

Type	L [mm] / H [mm]	500	600	700	800	900	1000	1100	1200	1400	1600	1800	2000	2300	2600	3000
K10H K10HM	144	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3
	218	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3
	366	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3
	514	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3
	588	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3
	662	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3
	884	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3
	958	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3
K11H K11HM	144	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3
	218	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3
	366	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3
	514	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3
	588	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3
	662	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3
	884	2	2	2	2	2	2	2	2	2	4	3	3	3	3	3
	958	2	2	2	2	2	2	2	2	2	4	3	3	3	3	
K20H K20HM	144	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3
	218	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3
	366	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3
	514	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3
	588	2	2	2	2	2	2	2	2	2	4	3	3	3	3	3
	662	2	2	2	2	2	2	2	2	4	4	3	3	3	3	
	884	2	2	2	2	2	4	4	4	4	4	3	3			
	958	2	2	2	2	4	4	4	4	4	4	3				
K21H K21HM	144	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3
	218	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3
	366	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3
	514	2	2	2	2	2	2	2	2	2	4	3	3	3	3	3
	588	2	2	2	2	2	2	2	2	4	4	3	3	3	3	
	662	2	2	2	2	2	2	2	4	4	4	3	3	3		
	884	2	2	2	2	4	4	4	4	4	4	3				
	958	2	2	2	2	4	4	4	4	4	4					
K22H K22HM	144	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3
	218	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3
	366	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3
	514	2	2	2	2	2	2	2	2	4	4	3	3	3	3	
	588	2	2	2	2	2	2	2	4	4	4	3	3	3		
	662	2	2	2	2	2	2	4	4	4	4	3	3			
	884	2	2	2	4	4	4	4	4	4						
	958	2	2	4	4	4	4	4	4	4						

Number of brackets for KORATHERM VERTIKAL, VERTIKAL - M, REFLEX

KORATHERM VERTIKAL, VERTIKAL - M, REFLEX

Type	L [mm] / H [mm]	144	218	366	514	558	662	884	958
K10V K10VM K10R	500	2	2	2	2	2	2	2	2
	600	2	2	2	2	2	2	2	2
	700	2	2	2	2	2	2	2	2
	800	2	2	2	2	2	2	2	2
	900	2	2	2	2	2	2	2	2
	1000	2	2	2	2	2	2	2	2
	1100	2	2	2	2	2	2	2	2
	1200	2	2	2	2	2	2	2	2
	1400	2	2	2	2	2	2	2	2
	1600	2	2	2	2	2	2	2	2
	1800	2	2	2	2	2	2	2	4
	2000	2	2	2	2	2	2	4	4

Type	144	218	366	514	558	662	884	958
K11V K11VM	2	2	2	2	2	2	2	2
	2	2	2	2	2	2	2	2
	2	2	2	2	2	2	2	2
	2	2	2	2	2	2	2	2
	2	2	2	2	2	2	2	2
	2	2	2	2	2	2	2	
	2	2	2	2	2	2	2	
	2	2	2	2	2	2	2	
	2	2	2	2	2	2	2	
	2	2	2	2	2	2	2	
	2	2	2	2	2	2	4	
	2	2	2	2	2	2	4	

Type	144	218	366	514	558	662	884	958
K20V K20VM K20R	2	2	2	2	2	2	2	2
	2	2	2	2	2	2	2	2
	2	2	2	2	2	2	2	2
	2	2	2	2	2	2	2	2
	2	2	2	2	2	2	2	4
	2	2	2	2	2	2	4	4
	2	2	2	2	2	2	4	4
	2	2	2	2	2	2	4	4
	2	2	2	2	2	4	4	4
	2	2	2	2	4	4	4	4
	2	2	2	4	4	4	4	4
	2	2	2	4	4	4	4	

The company reserves the right to make technical changes.