




KORATHERM® INFORMATION FOR WALL MOUNTING

Single wall bracket

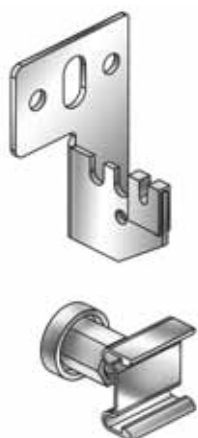

- The set includes two brackets, two supports, 8 x 60 mm screws, and ø 10 mm expansion plugs
- Metal parts are galvanized
- For use in concrete construction and cellular concrete or solid brick construction
- For wall mounting at a distance of **D = 40 mm** from the wall
- Maximum vertical load for the bracket is **500 N**

Ordering brackets

Type	Order number
Single wall bracket	Z-U320

Number of brackets for KORATHERM HORIZONTAL, HORIZONTAL - M

		KORATHERM HORIZONTAL, HORIZONTAL - M														
Type	L [mm] H [mm]	500	600	700	800	900	1000	1100	1200	1400	1600	1800	2000	2300	2600	3000
		K10H K10HM	144	2	2	2	2	2	2	2	2	2	2	3	3	3
218	2		2	2	2	2	2	2	2	2	2	3	3	3	3	3
366	2		2	2	2	2	2	2	2	2	4	3	3	3	3	3
514	2		2	2	2	2	2	4	4	4	4	3	3	3	3	3
588	2		2	2	2	4	4	4	4	4	4	3	3	3	3	3
662	2		2	2	4	4	4	4	4	4	4	3	3	3	3	3
884	2		4	4	4	4	4	4	4	4	4	3	3	6	6	6
958	4	4	4	4	4	4	4	4	4	4	3	3	6	6	6	
K11H K11HM	144	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3
	218	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3
	366	2	2	2	2	2	2	2	2	2	4	3	3	3	3	3
	514	2	2	2	2	4	4	4	4	4	4	3	3	3	3	3
	588	2	2	2	4	4	4	4	4	4	4	3	3	3	3	6
	662	2	2	4	4	4	4	4	4	4	4	3	3	3	6	6
	884	4	4	4	4	4	4	4	4	4	4	6	6	6	6	6
958	4	4	4	4	4	4	4	4	4	4	6	6	6	6	6	
K20H K20HM	144	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3
	218	2	2	2	2	2	2	2	2	2	4	3	3	3	3	3
	366	2	2	2	4	4	4	4	4	4	4	3	3	3	3	6
	514	2	4	4	4	4	4	4	4	4	4	3	6	6	6	6
	588	4	4	4	4	4	4	4	4	4	4	6	6	6	6	6
	662	4	4	4	4	4	4	4	4	4	4	6	6	6	6	6
	884	4	4	4	4	4	4	4	4	4	4	6	6	6	6	6
958	4	4	4	4	4	4	4	4	4	4	6	6	6	6	6	
K21H K21HM	144	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3
	218	2	2	2	2	2	2	2	4	4	4	3	3	3	3	3
	366	2	2	4	4	4	4	4	4	4	4	3	3	3	6	6
	514	4	4	4	4	4	4	4	4	4	4	6	6	6	6	6
	588	4	4	4	4	4	4	4	4	4	4	6	6	6	6	6
	662	4	4	4	4	4	4	4	4	4	4	6	6	6	6	6
	884	4	4	4	4	4	4	4	4	4	4	6	6	6	6	6
958	4	4	4	4	4	4	4	4	4	4	6	6	6	6	6	
K22H K22HM	144	2	2	2	2	2	2	2	2	2	4	3	3	3	3	3
	218	2	2	2	2	2	2	4	4	4	4	3	3	3	3	3
	366	2	4	4	4	4	4	4	4	4	4	3	3	6	6	6
	514	4	4	4	4	4	4	4	4	4	4	6	6	6	6	6
	588	4	4	4	4	4	4	4	4	4	4	6	6	6	6	6
	662	4	4	4	4	4	4	4	4	4	4	6	6	6	6	6
	884	4	4	4	4	4	4	4	4	4	4	6	6	6	6	6
958	4	4	4	4	4	4	4	4	4	4	6	6	6	6	6	

Number of brackets for KORATHERM VERTIKAL, VERTIKAL - M, REFLEX

		KORATHERM VERTIKAL, VERTIKAL - M, REFLEX																											
Type	L [mm] H [mm]	144	218	366	514	558	662	884	958	Type	144	218	366	514	558	662	884	958	Type	144	218	366	514	558	662	884	958		
		K10V K10VM K10R	500	2	2	2	2	2	2	2	4	K11V K11VM	2	2	2	2	2	2	4	4	K20V K20VM K20R	2	2	2	4	4	4	4	4
600	2		2	2	2	2	2	4	4	2	2		2	2	2	2	4	4	2	2		2	4	4	4	4	4		
700	2		2	2	2	2	2	4	4	2	2		2	2	2	2	4	4	2	2		2	4	4	4	4	4		
800	2		2	2	2	2	4	4	4	2	2		2	2	4	4	4	4	2	2		4	4	4	4	4	4		
900	2		2	2	2	4	4	4	4	2	2		2	4	4	4	4	4	2	2		4	4	4	4	4	4		
1000	2		2	2	4	4	4	4	4	2	2		2	4	4	4	4	4	2	2		4	4	4	4	4	4		
1100	2		2	2	4	4	4	4	4	2	2		2	4	4	4	4	4	2	2		4	4	4	4	4	4		
1200	2		2	2	4	4	4	4	4	2	2		2	4	4	4	4	4	2	2		4	4	4	4	4	4		
1400	2		2	4	4	4	4	4	4	2	2		4	4	4	4	4	4	2	4		4	4	4	4	4	4		
1600	2		2	4	4	4	4	4	4	2	2		4	4	4	4	4	4	2	4		4	4	4	4	4	4		
1800	2	2	4	4	4	4	4	4	2	2	4	4	4	4	4	4	3	4	4	4	4	4	4	4					
2000	2	2	4	4	4	4	4	4	2	2	4	4	4	4	4	4	3	4	4	4	4	4	-	-					